


## Daytime Running Lights & Follow Me Home Relay

Product Code **201.013.007 - 12V**

### Terminal Configuration & Dimensions & Diagram

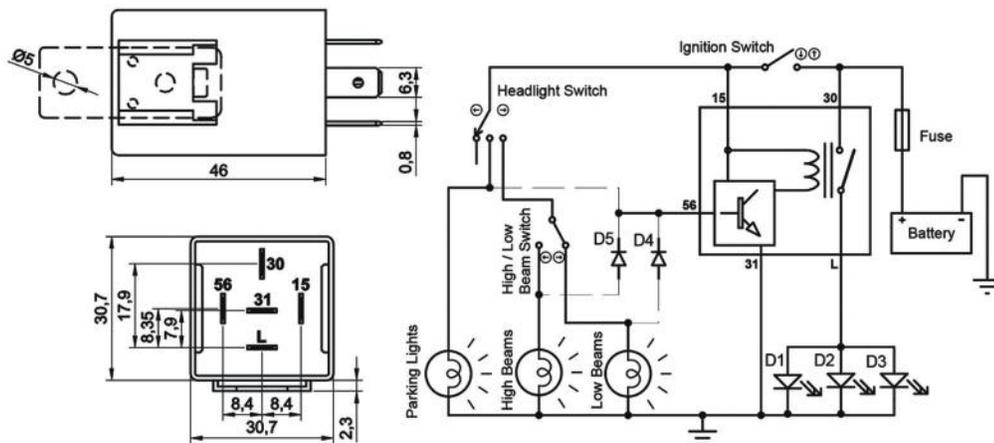

### Accessories

- 207.150.251 Socket – 5 Terminals, 5 Cables - Black (Standard cable length 20 cm & cable cross section 1,50 mm<sup>2</sup>)\*
- 207.100.003 Socket – 5 Terminals – Black & Blue/ Pack of 2
- 207.100.001 Socket – 5 Terminals – Black
- 207.100.002 Socket – 5 Terminals – Blue

\* Indicates cross section of cables carrying higher current. Please refer to **Socket Product Group** pages for different alternatives.

### Technical Data

<b>Nominal Voltage</b>	12V	<b>Vibration</b>	20-200Hz,5g;>10µs
<b>Operating Voltage</b>	8,0 - 16,0Vdc	<b>Mechanical Shock</b>	>10g, 11ms>10µs
<b>Rated Continuous Load</b>	10A	<b>IP Rating</b>	IP54 DIN IEC60529
<b>Load Power</b>	140W	<b>Terminals</b>	6,3 x 0,8mm
<b>Waiting Period After Ignition Switch in Turned On</b>	10 seconds	<b>Terminals / Plating</b>	Fe/E-Sn
<b>Waiting Period After Ignition Switch in Turned Off</b>	30 seconds	<b>Bracket / Plating</b>	Fe/E-Zn
<b>Dielectric Strength</b>	>1000Vdc	<b>Ambient Temperature</b>	- 40 / + 80 °C

### Product Details

The ELO Daytime Running Lights & Follow Me Home Relay automatically illuminates the headlights or led lights that are mandatory to be used during the day. It is also a relay that carries all the features of ELO Follow Me Home Relay. It illuminates the daytime running lights or led lights 10 seconds after the ignition switch is turned on. According to the connection preference during installation, when the parking lamps, short or high-beam headlights are activated, the relay is deactivated. When the ignition switch is turned off, it remains on for 30 more seconds and then goes off automatically.

### Notes

All measurements are in millimeters.