

## Electronic Flasher with Audio Warning

Product Code **203.107.001**


• 12V

• 3 Terminals (+,L,-)

• w/ Audio Warning



### Terminal Configuration & Dimensions & Diagram

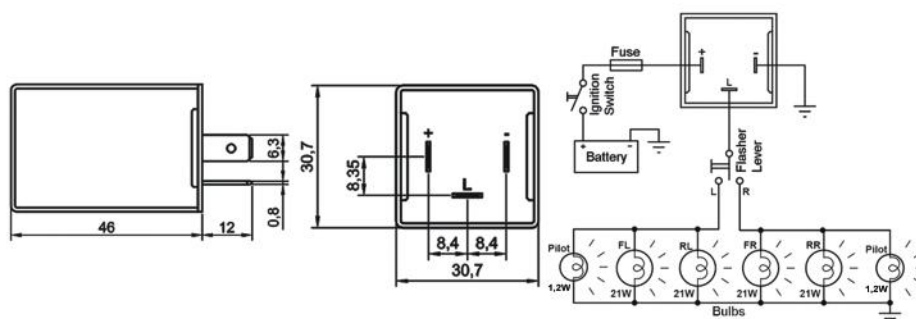




### Accessories

- 207.130.251 Socket – 5 Terminals, 3 Cables - Black (Standard cable length 20 cm & cable section 1,50 mm<sup>2</sup>)\*
- 207.100.003 Socket – 5 Terminals – Black & Blue/ Pack of 2
- 207.100.001 Socket – 5 Terminals – Black
- 207.100.002 Socket – 5 Terminals – Blue

\* Indicates cross section of cables carrying higher current. Please refer to **Socket Product Group** pages for different alternatives.

### Technical Data

<b>Nominal Voltage</b>	12V	<b>Number of Poles &amp; Marking</b>	3 (+,L,-)
<b>Operating Voltage</b>	10-16V	<b>Independent Output for Tell-Tale Light (Terminal)</b>	-
<b>Rated Load - Direction Flashing</b>	4x21W	<b>Independent Output for Trailer Tell-Tale Light (Terminal)</b>	-
<b>Rated Load - Hazard Flashing</b>	10x21W	<b>Independent Output for Second Trailer Tell-Tale Light (Terminal)</b>	-
<b>Maximum Load</b>	10x21W+2x3W+2x1,2W	<b>Additional Features</b>	w/ Audio Warning
<b>Flashes per minute</b>	90±15	<b>Mostly Used for Vehicle Made in</b>	Germany
<b>On/Off Time (%)</b>	45 / 55 ( ±5 )	<b>Ambient Temperature</b>	-40 / +90 °C
<b>Lamp Outage Detection</b>	-	<b>Bracket</b>	-
<b>Lamp Outage Indication Method</b>	-		

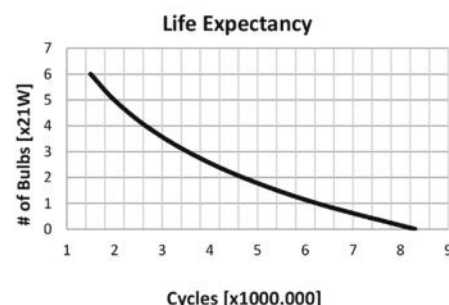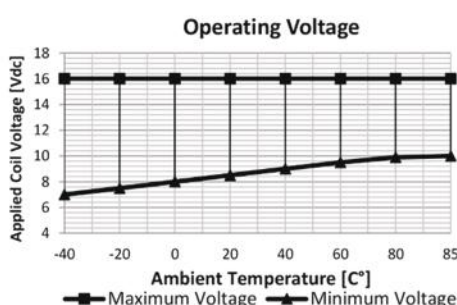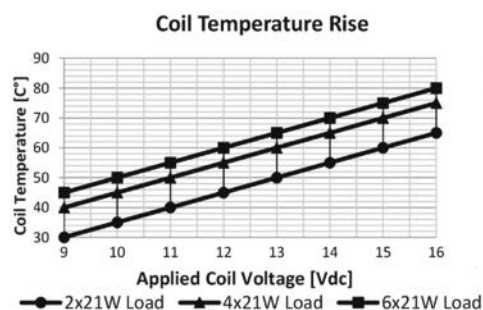

### Product Details

ELO Electronic Flasher w/ Audio Warning carries 2 x 21W + 3W on directional lights, and 4 x 21W + 2 x 3W on hazard lights. The unique feature of this flasher is the audio to warn the driver in sequence with the flashers.

This feature eliminates the possibility of the driver forgetting the flasher on. All 3 Terminals of the flasher (+, L, -) are 6,3 mm. plug-in terminals.

### Notes

All measurements are in millimeters.



## Electronic Flasher with Audio Warning


Product Code **203.107.002**

• 24V

• 3 Terminals (+,L,-)

• w/ Audio Warning

### Terminal Configuration & Dimensions & Diagram

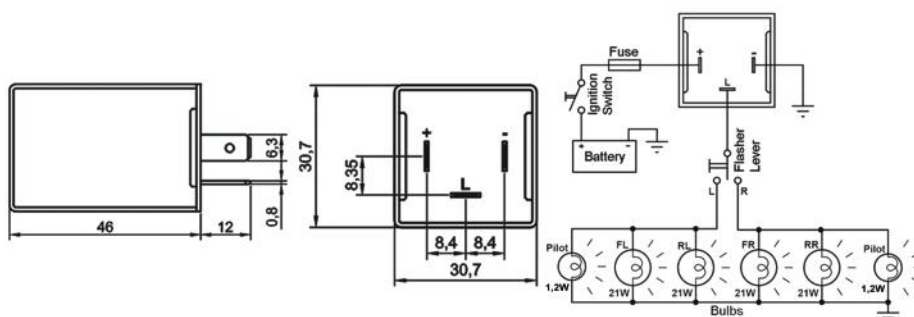




### Accessories

- 207.130.251 Socket – 5 Terminals, 3 Cables - Black (Standard cable length 20 cm & cable section 1,50 mm<sup>2</sup>)\*
- 207.100.003 Socket – 5 Terminals – Black & Blue/ Pack of 2
- 207.100.001 Socket – 5 Terminals – Black
- 207.100.002 Socket – 5 Terminals – Blue

\* Indicates cross section of cables carrying higher current. Please refer to **Socket Product Group** pages for different alternatives.

### Technical Data

<b>Nominal Voltage</b>	24V	<b>Number of Poles &amp; Marking</b>	3 (+,L,-)
<b>Operating Voltage</b>	20-30V	<b>Independent Output for Tell-Tale Light (Terminal)</b>	-
<b>Rated Load - Direction Flashing</b>	4x21W	<b>Independent Output for Trailer Tell-Tale Light (Terminal)</b>	-
<b>Rated Load - Hazard Flashing</b>	10x21W	<b>Independent Output for Second Trailer Tell-Tale Light (Terminal)</b>	-
<b>Maximum Load</b>	10x21W+2x3W+2x1,2W	<b>Additional Features</b>	w/ Audio Warning
<b>Flashes per minute</b>	90±15	<b>Mostly Used for Vehicle Made in</b>	Germany
<b>On/Off Time (%)</b>	45 / 55 ( ±5 )	<b>Ambient Temperature</b>	-40 / +90 °C
<b>Lamp Outage Detection</b>	-	<b>Bracket</b>	-
<b>Lamp Outage Indication Method</b>	-		

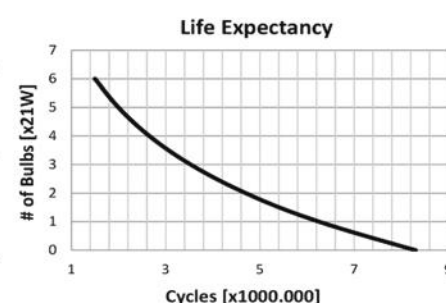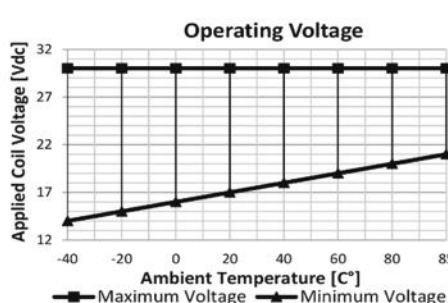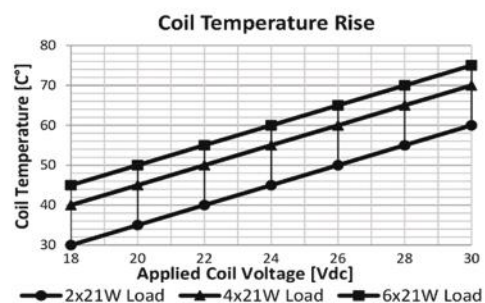

### Product Details

ELO Electronic Flasher w/ Audio Warning carries 2 x 21W + 3W on directional lights, and 4 x 21W + 2 x 3W on hazard lights. The unique feature of this flasher is the audio to warn the driver in sequence with the flashers.

This feature eliminates the possibility of the driver forgetting the flasher on. All 3 Terminals of the flasher (+, L, -) are 6,3 mm. plug-in terminals.

### Notes

All measurements are in millimeters.

