


**Buzzer w/ Melody**

Product Code **203.107.003**

- 12V
- 2 Terminals ( +, - )
- w/ Melody
- w/ Bracket

**Terminal Configuration & Dimensions & Diagram**

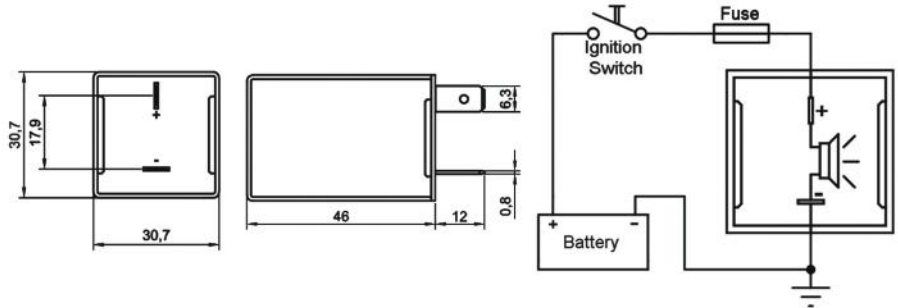

**Accessories**

- 207.121.251 Socket – 5 Terminals, 2 Cables - Black (Standard cable length 20 cm & cable section 1,50 mm<sup>2</sup>)\*
- 207.100.003 Socket – 5 Terminals – Black & Blue/ Pack of 2
- 207.100.001 Socket – 5 Terminals – Black
- 207.100.002 Socket – 5 Terminals – Blue

\* Indicates cross section of cables carrying higher current. Please refer to **Socket Product Group** pages for different alternatives.

**Technical Data**

<b>Nominal Voltage</b>	12V	<b>Audio Type</b>	w/ Melody
<b>Operating Voltage</b>	8-16V	<b>Piezo Buzzer Diameter</b>	22mm
<b>Warning / Minute</b>	220	<b>Number of Poles (Marking)</b>	2 ( +, - )
<b>Audio Frequency</b>	3,8 - 4,2kHz	<b>Ambient Temperature</b>	-40 / +90 °C
<b>Sound Level</b>	66dB	<b>Bracket</b>	Yes

**Product Details**

Forgetting the headlights or the radio on makes it difficult or even impossible to start the car, as it consumes battery on a stationary position. ELO Warning Buzzer of 203.107.003 is designed to warn the driver for such instances.

ELO Warning Buzzers have 2 terminals of (+) and (-). The buzzer may be used for variety of applications such as to warn the driver that the car is in reverse gear, hand brake is not engaged, the headlights are on, the seatbelt is not fastened, and many more.

ELO Warning Buzzer with Melody produces a melodic sound that resembles an electronic ring-tone (66 dB). It is recommended to use only when a reminder or warning is required.

There are also various ELO Warning Buzzers w/ 4 Tone with (-) and (+) trigger in 12V and 24V.

**Notes**

Available in black cover and/or w/o bracket upon request.  
All measurements are in millimeters.