


## Melody Magician

Product Code                      **210.500.001 - 12V**  
    **210.500.003 - 24V**



### Dimensions & Diagram

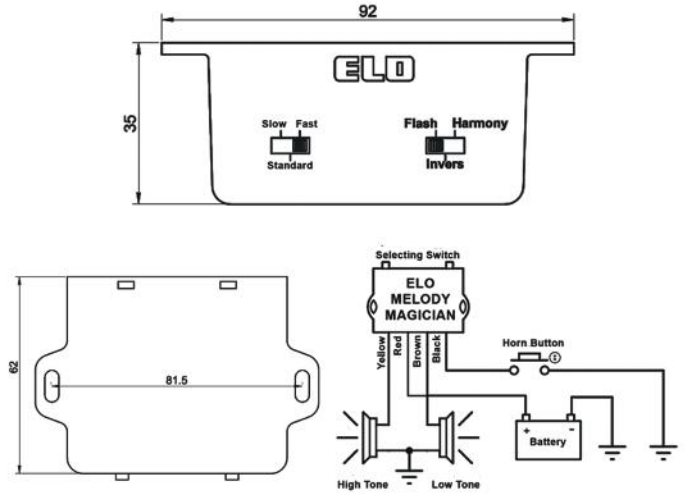

### Technical Data

	<b>210.500.001</b>	<b>210.500.003</b>
<b>Nominal Voltage</b>	12V	24V
<b>Operating Voltage</b>	10-16V	20-30V
<b>Rated Continuous Load</b>	20A	10A
<b>Controllable Number of Horns</b>	2	2
<b>Compatible With</b>	Disc Horn	Disc Horn
<b>Number of Melodies</b>	6+1	6+1
<b>Dielectric Strength</b>	>1000Vdc	>1000Vdc
<b>Vibration</b>	20-200Hz,5g:>10us	20-200Hz,5g:>10us
<b>Mechanical Shock</b>	>10g, 11ms>10us	>10g, 11ms>10us
<b>IP Rating</b>	IP54 DIN IEC60529	IP54 DIN IEC60529
<b>Ambient Temperature</b>	-40 / +60 °C	-40 / +60 °C
<b>Dimensions</b>	92x62x35mm	92x62x35mm

### Product Details

ELO Melody Magician is manufactured for use in 12V and 24V vehicles with high and low pitch double horns. Easy to install and connect, the ELO Melody Magician allows the user to play 7 different melodies with 2 independent switches on the box. ELO Melody Magician should be installed in a place of easy access for switching between melodies without compromising driving safety. ELO Melody Magician has the option to return to factory settings at any time.

#### Notes

All measurements are in millimeters.

